

MODEL 5120-08_{POE}

MILITARY GRADE 8-PORT POE SWITCH SMB / MANAGED




The 5000 Series consists of a family of COTS IT equipment (such as switches, routers, firewalls and servers) which are then ruggedized and housed in standard and custom "reference design" enclosures. They support highly rugged and MIL-spec applications utilized by the defense/aerospace markets as well as high reliability industrial such as railway and oil/gas.

The 5100 Class is a family of conduction cooled switches ideally suited for applications requiring a sealed chassis without the use of forced air convection. This class of products includes 8 to 24 port switches which are managed or unmanaged. The COTS devices used are Small-Medium Business or Enterprise class Netgear® and Cisco® products.

The Model 5120-08POE is a full military grade, IP66 rated, conduction cooled chassis which houses a ruggedized Netgear® GS108PE gigabit ethernet switch. This 8 port device is an easy to use managed switch suited for small-medium business sized networks. This model is unique due to the 4ea Power-over-Ethernet (PoE) ports available.

Optional features include rackmounting kit, heater for -20°C operation, D38999 connectors to replace RJField connectors, and power input options of 18-32VDC, 110-220VAC 50/60Hz or 115VAC 47-440Hz.

For more information please visit: www.novaintegration.com

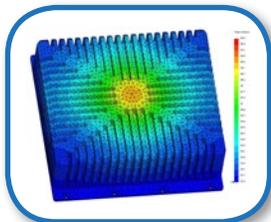

- › **8 Port Gigabit Ethernet Switch**
- › **Managed Switch / Small-Medium Business**
- › **4 ports Power-over-Ethernet (PoE)**
- › **Ruggedized Netgear® GS108PE**
- › **NOVA's proprietary, overlapping machined panel design results in zero torsional flex and superior sealing for FOD and EMI**
- › **Conduction cooled IP66 rated housing**
- › **MIL-STD-810G and RTCA/DO-160E temperature, altitude, humidity, shock, vibration, explosive atmosphere, salt spray and sand / dust**
- › **MIL-STD-461E EMI/EMC**
- › **Customer definable I/O panel**
- › **18-32VDC, 110-220VAC or 115VAC / 47-440Hz power input available**
- › **Thermal and structural simulations have been completed validating all designs**
- › **Very low power consumption <10W**
- › **Tabletop or 1U Rackmount**
- › **Optional heater for -20°C operation**

AS 9100
BUREAU VERITAS
Certification
Certificate No: US008267-1



ENVIRONMENTAL CHARACTERISTICS

Temperature, operating	0°C to +55°C -20°C to +55°C w/ heater
Temperature, non-operating	-40°C to +85°C
Humidity	0% to 100%, non-condensing MIL-STD-810D, Method 507.2, Fig 507.2-3
Altitude, operating	-1,000 to 15,000 ft (minimum) RTCA/DO-160E, Paragraph 4.6.1, Category A
Altitude, non-operating	-1,000 ft. to 60,000 ft. RTCA/DO-160E, Paragraph 4.6.1
Decompression	65,000 ft. tested per RTCA/DO-160E, Paragraph 4.6.2
Vibration	MIL-STD-810F, Method 514.6, Procedure I
Acceleration	40G, any axis per MIL-STD-810D method 513.3
Shock	MIL-STD-810F, Method 516.6, Procedures I
Shock, non-operating (Bench Handling)	MIL-STD-810F, Method 516.6, Procedures V & VI
EMI/EMC	MIL-STD-461F CE102, CE106, CS101, CS114, CS115, CS116, RE102, RS103
Electrical Bonding	MIL-HDBK-1857
ESD	MIL-STD-1686A
Explosive Atmosphere	RTCA/DO-160E, Paragraph 9.7.2, Category E
Salt Spray	RTCA/DO-160E, Paragraph 14.2, Category 5
Sand and Dust	RTCA/DO-160E, Paragraph 12.3, Category D

Fungus Resistance	MIL-STD-454N, Requirement 4
Fluid Contamination	Jet fuel DERD 2494, hydraulic fluid MIL-H-5606E, lube oil mixtures to DERD 2497/ MIL-L-7808 & soap water

PHYSICAL CHARACTERISTICS

Dimensions	7" D x 17.32" W x 1.73" H
Weight	3.5 lbs.
Mounting	Tabletop or Rackmount
Sealing	IP66
Chassis Body	Machined aluminum alloy #6061-T6
Cooling	Conduction

ELECTRICAL CHARACTERISTICS

Input Power	18-32 VDC 110-220VAC (nominal) 115VAC, 47-440Hz
Power Consumption	60W max 85W with optional heater
Voltage Hold Up	MIL-STD-704A (optional)

PERFORMANCE CHARACTERISTICS

Gigabit ports	8
PoE Ports	4
Max MAC entries	4K
Buffer size	192KB

Forwarding modes	Store-and-forward
Bandwidth	16 Gbps full duplex
Network latency	Less than 15µs for 64-byte frames in store-and-forward mode for 1000 Mbps to 1000 Mbps transmission
Jumbo frame support	up to 9K packet size
DSCP	No
IEEE 802.1p COS	Yes
IEEE 802.3 Ethernet	IEEE 802.1p Class of Service IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x full-duplex flow control
Standards	Front I/O panel Heater Power Input Mounting
Customization	

Note: For additional performance characteristics see manual for the Netgear® GS108PE.


ORDERING TABLE

95-5120-08HMP-00X

HEATER	MOUNT	POWER	CONFIG
6 None	0 Tabletop	2 18-32VDC	1 Standard
7 Installed	2 Rackmount	5 110-220VAC	x Customer Specific
		6 115VAC	
		47-440Hz	

Contact Nova Integration Solutions for custom configurations

OUTLINE DRAWING

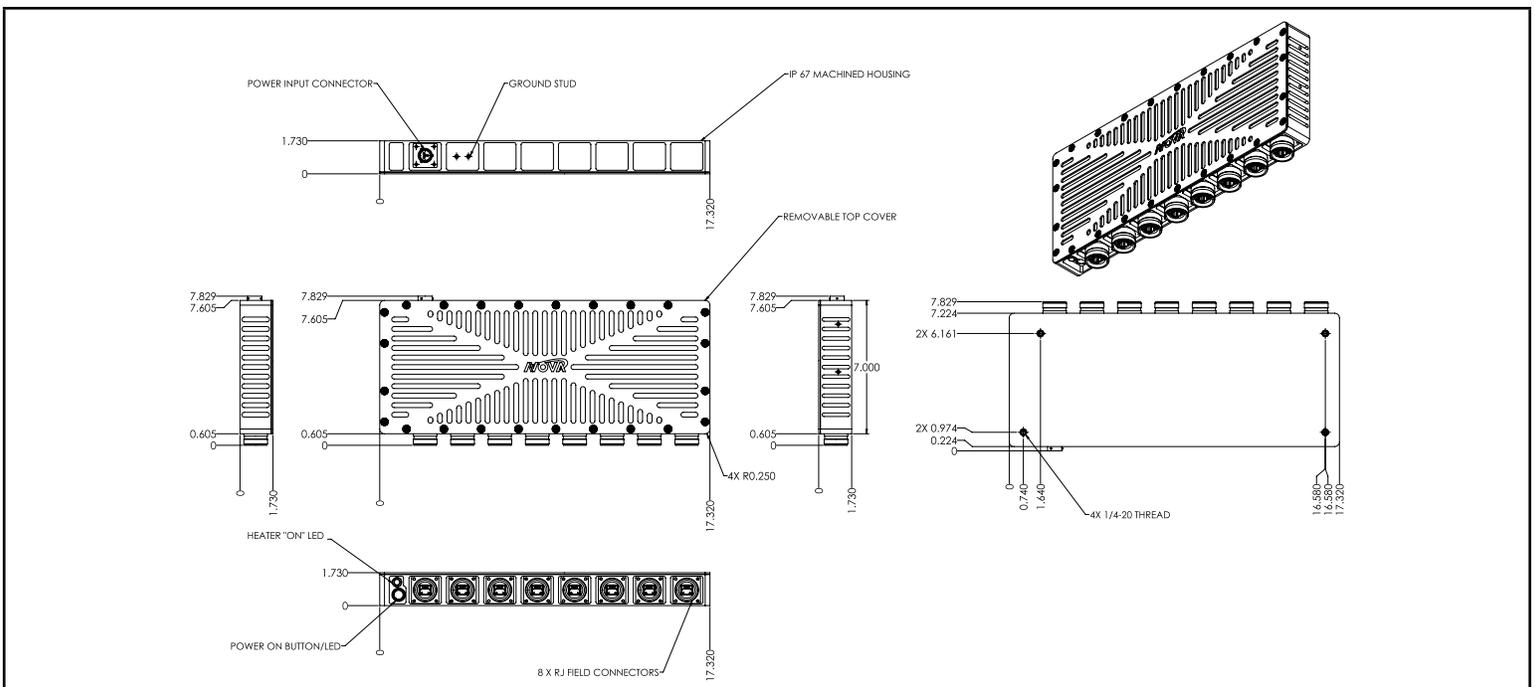

* Products may vary from the specifications and images depicted within this document and are subject to change without notice. Nova Integration Solutions takes no responsibility for damages incurred due to errors contained in this document. Please contact Nova Integration Solutions for further information about our products.